

Monimax[™] 5000CE

Value, Delivered

The simple and compact Monimax 5000CE creates endless value through its cost-competitiveness and enhanced SSL performance.

Features

- **TCP/IP with SSL Support** - Monimax 5000CE is designed to guarantee secure transactions with its built-in TCP/IP with SSL(Secure Socket Layer) feature for use while connected to the Internet. The new connectivity feature allows for a direct connection without having to add any additional boxes, adapters or converters, saving time, and added costs for the customer.
- **From 1,000 Notes Up To 6,000 Notes Capacity** - Monimax 5000CE provides customers the ability to select a dispenser option based on the volume of transactions at the site. The choices vary in configurations from a 1 to 3 denomination Dispenser with a 1,000 or 2,000 note cassette option, offering greatest value and savings.
Monimax 5000CE is the ideal solution for customers who are looking for the same look and design for multiple locations with various dispenser options.
- **Small Footprint** - Satisfying ADA standards, Monimax 5000CE with its small footprint, is the best choice for retail locations.



Driving tomorrow's technology
NAUTILUS HYOSUNG



Dependable Customer Service:

We understand the importance of speedy resolution to any issues arising in the operation. Our representatives offer real solutions with real results for maximum return on your investment.



Monimax™ 5000 CE

Value, Delivered



System Platform

Embedded Windows platform

- Intel® Xscale® processor
- Microsoft® Windows® CE

Customer Display

- 10.4" TFT LCD

Communication

- Dial-up or
- TCP/IP (SSL configurable)

Input Type

- 4 x 2 Function keys
- 4 x 4 Numeric keys
- VISA / PCI EPP (Encrypting PIN pad)
- ADA compliant

Card Handling

- Dip type card reader

Optional

- IC card reader
- EMV Level 1, 2

Cash Dispensing

- 1000 notes cassette
- 2000 notes cassette (Up to 3 Cassettes)

Printers

- 3.1" Graphical thermal receipt printer
- Electronic journal
- **Optional** Journal printer

Security

- UL291 Business hour
- Standard electronic safe lock
- **Optional** KABA Mas Cencon safe lock

Miscellaneous

- Lead-through indicator
- **Optional** high brightness topper

Power Supply

- AC 110 ~ 230V, 50 ~ 60Hz


Operating Environment

- Temperature
0°C ~ 40°C (32°F ~ 104°F)
- Humidity
20% ~ 85%

Dimensions

- Height : 1,360mm (53.5")
- Width : 400mm (15.7")
- Depth : 631mm (24.8")
- Weight : 115kg (253.5 lbs)
(when Monimax 5000CE 1K CDU equipped)

Internal components may change with the introduction of new technology. Nautilus Hyosung reserves the right to change the specifications of this ATM to accommodate the changes in technology.

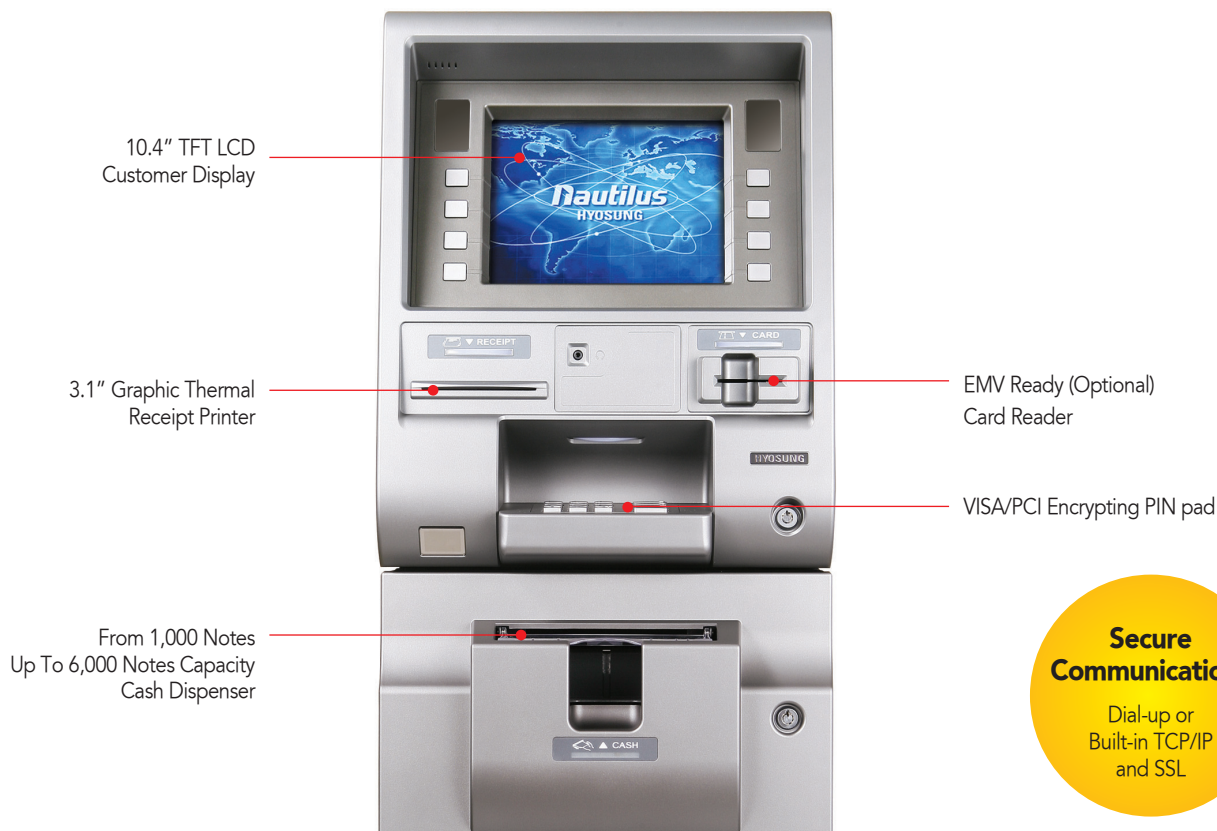

Secure Communications

Dial-up or
Built-in TCP/IP
and SSL

Contact your authorized Nautilus Hyosung distributor or representative for more information.



HYOSUNG
NAUTILUS HYOSUNG INC.

Cheongdam Bldg., 52 Cheongdam-Dong, Gangnam-Gu, Seoul, Korea 135-764
TEL : +82-2-510-0441 FAX : +82-2-3442-7993
<http://www.nautilus.hyosung.com>